

LENS OB-SWIR200/2.4 – P/N C1116

General Description

This family of high resolution SWIR lenses image from 0.9 – 2.3 μm making them especially well-suited for PCB inspection, special laser applications, surveillance and alignment and tracking. A high F/N and excellent transmission characteristics allow superior imaging in these wavelengths of interest.



Optical and mechanical parameters

Focal length	200 mm
Image format (diagonal)	20.5 mm
F.O.V. (diagonal)	5.87 degrees
Max aperture	F/N = 2.4
Object format	N.A.
Min working distance	5 m
Zoom value	N.A.
Focus	Manual
Iris	Max F/N = 2.4 Min F/N = 16

N. of elements	6
Dimensions	Dia 104 x 186mm
Weight	2.4 Kg
Options	
Motorized focus	Upon request
Motorized iris	Upon request
Motorized zoom	N.A.
Other mount type	Upon request
Customization	Upon request

107

P/N	wavelength range	mount type	note
C1116.001	900-1700 nm	Canon FD	With iris diaphragm
C1116.002		Nikon	
C1116.003		M42 Screw	
C1116.005	1700-2300 nm	Canon FD	
C1116.006		Nikon	
C1116.007		M42 Screw	
C1116.010	900-2300 nm	Canon FD	
C1116.011		Nikon	
C1116.012		M42 Screw	


Specification are subject to change without notice

P/N	wavelength range	mount type	note
C1116.071	900-1700 nm	Canon FD	With motorized iris
C1116.072		Nikon	
C1116.073		M42 Screw	
C1116.081	1700-2300 nm	Canon FD	
C1116.082		Nikon	
C1116.083		M42 Screw	
C1116.091	900-2300 nm	Canon FD	
C1116.092		Nikon	
C1116.093		M42 Screw	
C1116.074	900-1700 nm	Canon FD	With motorized focus
C1116.075		Nikon	
C1116.076		M42 Screw	
C1116.084	1700-2300 nm	Canon FD	
C1116.085		Nikon	
C1116.086		M42 Screw	
C1116.094	900-2300 nm	Canon FD	
C1116.095		Nikon	
C1116.096		M42 Screw	
C1116.077	900-1700 nm	Canon FD	With motorized iris and focus
C1116.078		Nikon	
C1116.079		M42 Screw	
C1116.087	1700-2300 nm	Canon FD	
C1116.088		Nikon	
C1116.089		M42 Screw	
C1116.097	900-2300 nm	Canon FD	
C1116.098		Nikon	
C1116.099		M42 Screw	



More details are available upon request and technical drawings are open for the customers and their needs.

MTF, Field Curvature, Distortion and Transmission from 900 to 1700 nm

The calculated MTF values are displayed below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting from the center (0%) to the corner (100%).

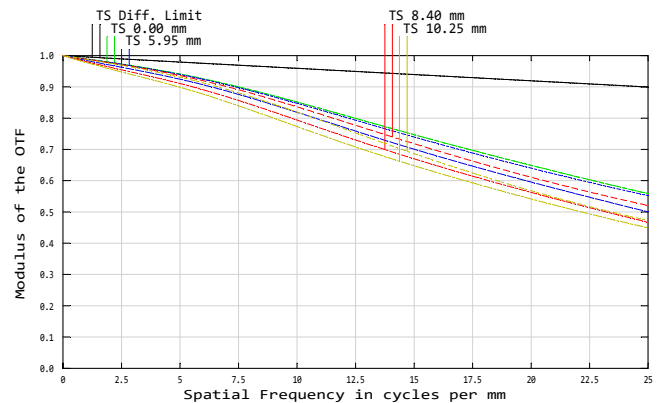

Polychromatic Diffraction MTF
 26/04/2011
 Data for 0.9000 to 1.7000 μm .
 Surface: Image
 Optec S.p.A.
 PROVA.8.B.zmx
 Configuration 1 of 1

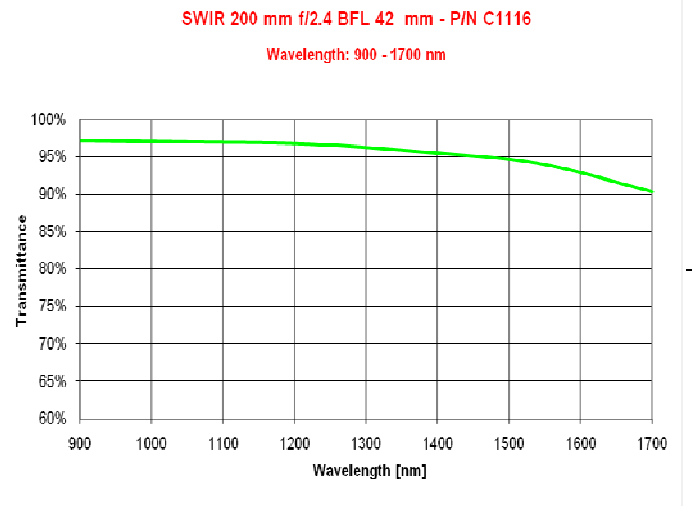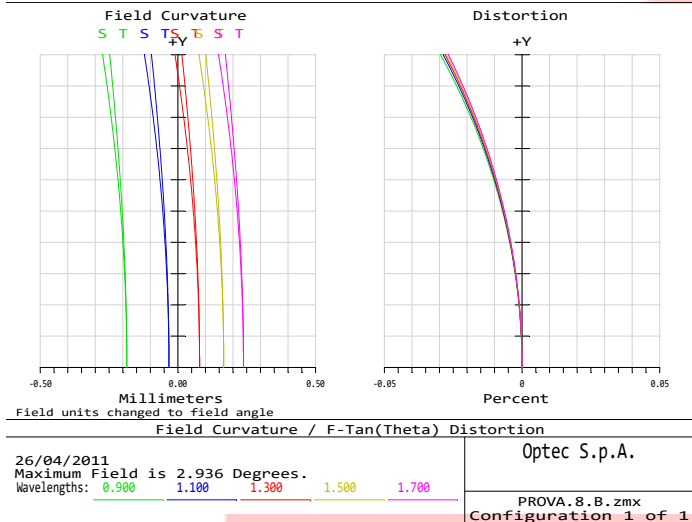

Optical parameters for wavelength range 0.9 – 1.7 μm




Resolution	MTF > 45% @ 25lp/mm
Distortion	< 0.05%
Average axial chromatic aberration	

Lens Transmission without coating	> 90%
Antireflection Coating	R \leq 1%
Vignetting	< 2%

Specification are subject to change without notice

MTF, Field Curvature, Distortion and Transmission from 1700 to 2300 nm

The calculated MTF values are displayed Below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting from the center (0%) to the corner (100%).

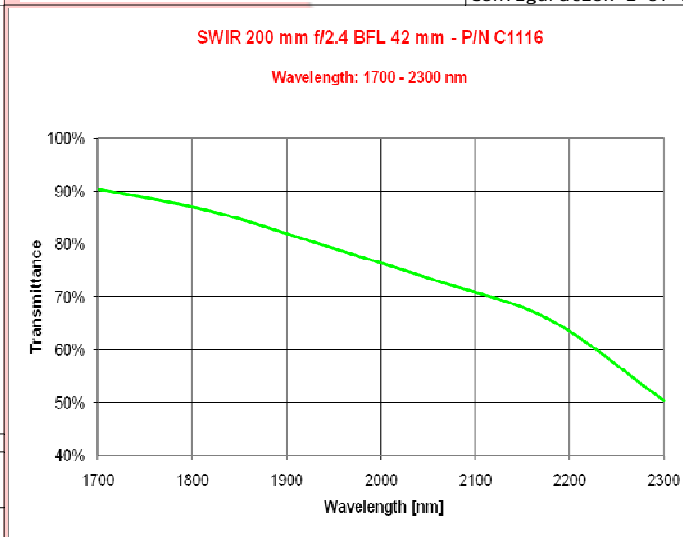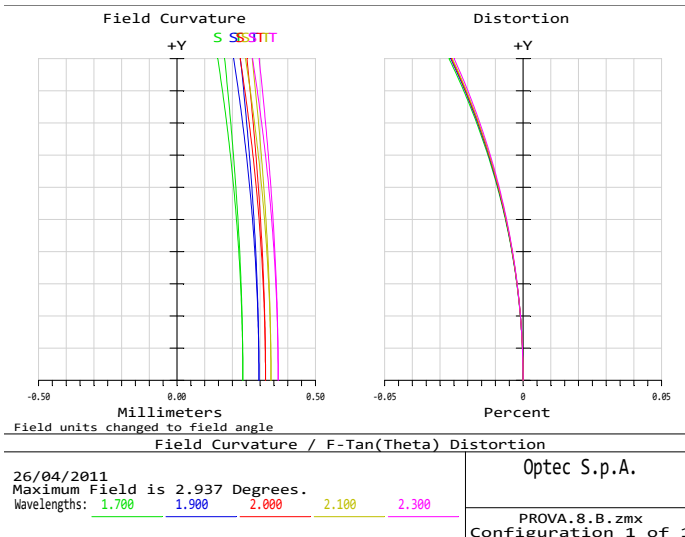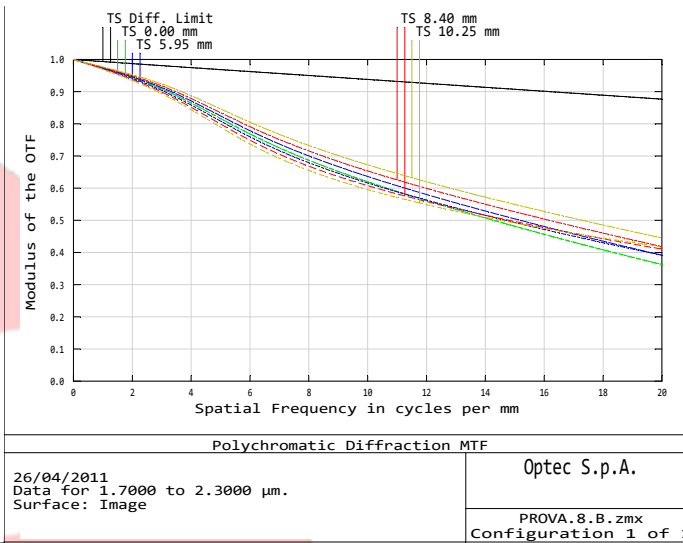

Optical parameters for wavelength range 1.7 – 2.3 μm


Resolution	MTF > 30% @ 20lp/mm
Distortion	< 0.05%

Lens Transmission without coating	> 50%
Antireflection Coating	R ≤ 1%

Specification are subject to change without notice

MTF, Field Curvature, Distortion and Transmission from 900 to 2300 nm

The calculated MTF values are displayed Below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting from the center (0%) to the corner (100%).

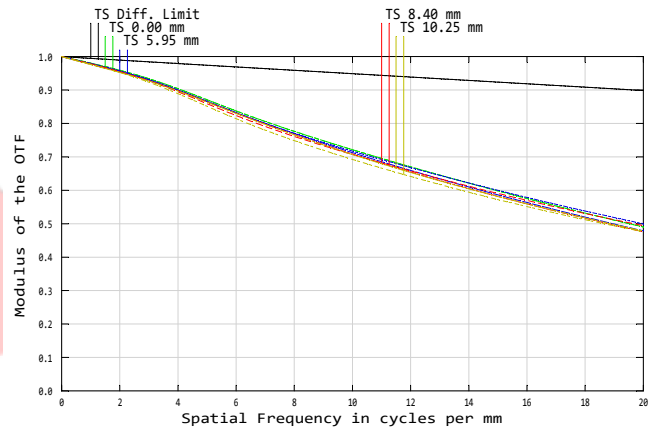


Polychromatic Diffraction MTF

26/04/2011
Data for 0.9000 to 2.3000 μm.
Surface: Image

Optec S.p.A.

PROVA.8.B.zmx
Configuration 1 of 1

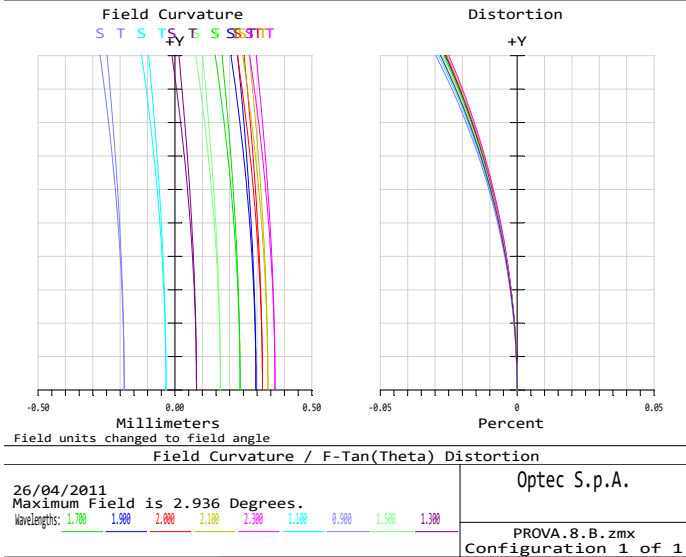

Field Curvature
S T S TS T S S S TT

Distortion
+Y


Field units changed to field angle

Field Curvature / F-Tan(Theta) Distortion

26/04/2011
Maximum Field is 2.936 Degrees.
Wavelengths: 1.700 1.900 2.000 2.100 2.300 1.100 0.900 1.500 1.300

Optec S.p.A.

PROVA.8.B.zmx
Configuration 1 of 1

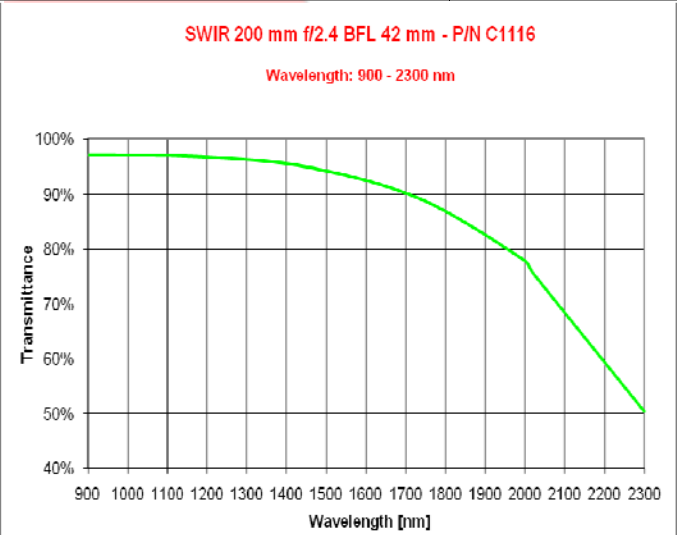

SWIR 200 mm f/2.4 BFL 42 mm - P/N C1116

Wavelength: 900 - 2300 nm

Optical parameters for wavelength range 0.9 – 2.3 μm

Resolution	MTF > 45% @ 20lp/mm
Distortion	< 0.05%

Lens Transmission without coating	> 50%
Antireflection Coating	R < 1%

Specification are subject to change without notice

Electrical data & Interfaces


IRIS FUNCTION

Motor model	Faulhaber 1516T009SR
Motor nominal voltage	9 VDC
Motor maximum power	0.54 W
Current limit	0.19 A
Feedback	10 kOhm multi-turn potentiometer
Potentiometer model	Spectrol 533-10K ±5%
Gearhead reduction ratio	592:1

FOCUS FUNCTION

Motor model	Faulhaber 1516T009SR
Motor nominal voltage	9 VDC
Motor maximum power	0.54 W
Current limit	0.19 A
Feedback	10 kOhm multi-turn potentiometer
Potentiometer model	Spectrol 533-10K ±5%
Gearhead reduction ratio	592:1

Hirose HR10A-10P-12P connector Pin list

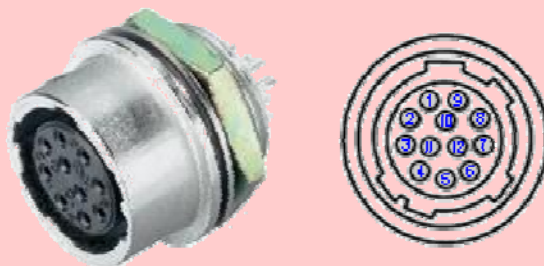


112

PIN	MOTORIZED IRIS	MOTORIZED FOCUS	MOTORIZED IRIS & FOCUS
1	Vcc	Vcc	Vcc
2	Gnd	Gnd	Gnd
3	NA	Analog Focus position	Analog Focus position
4	Analog Iris position	NA	Analog Iris position
5	Identification resistor #1	Identification resistor #1	Identification resistor #1
6	Identification resistor #2	Identification resistor #2	Identification resistor #2
7	NA	Focus Motor +	Focus Motor +
8	NA	Focus Motor –	Focus Motor –
9	Iris Motor +	NA	Iris Motor +
10	Iris Motor –	NA	Iris Motor –


Every shipped motorized lens will be provided with potentiometers values of end positions for both focus and iris motor

Specification are subject to change without notice

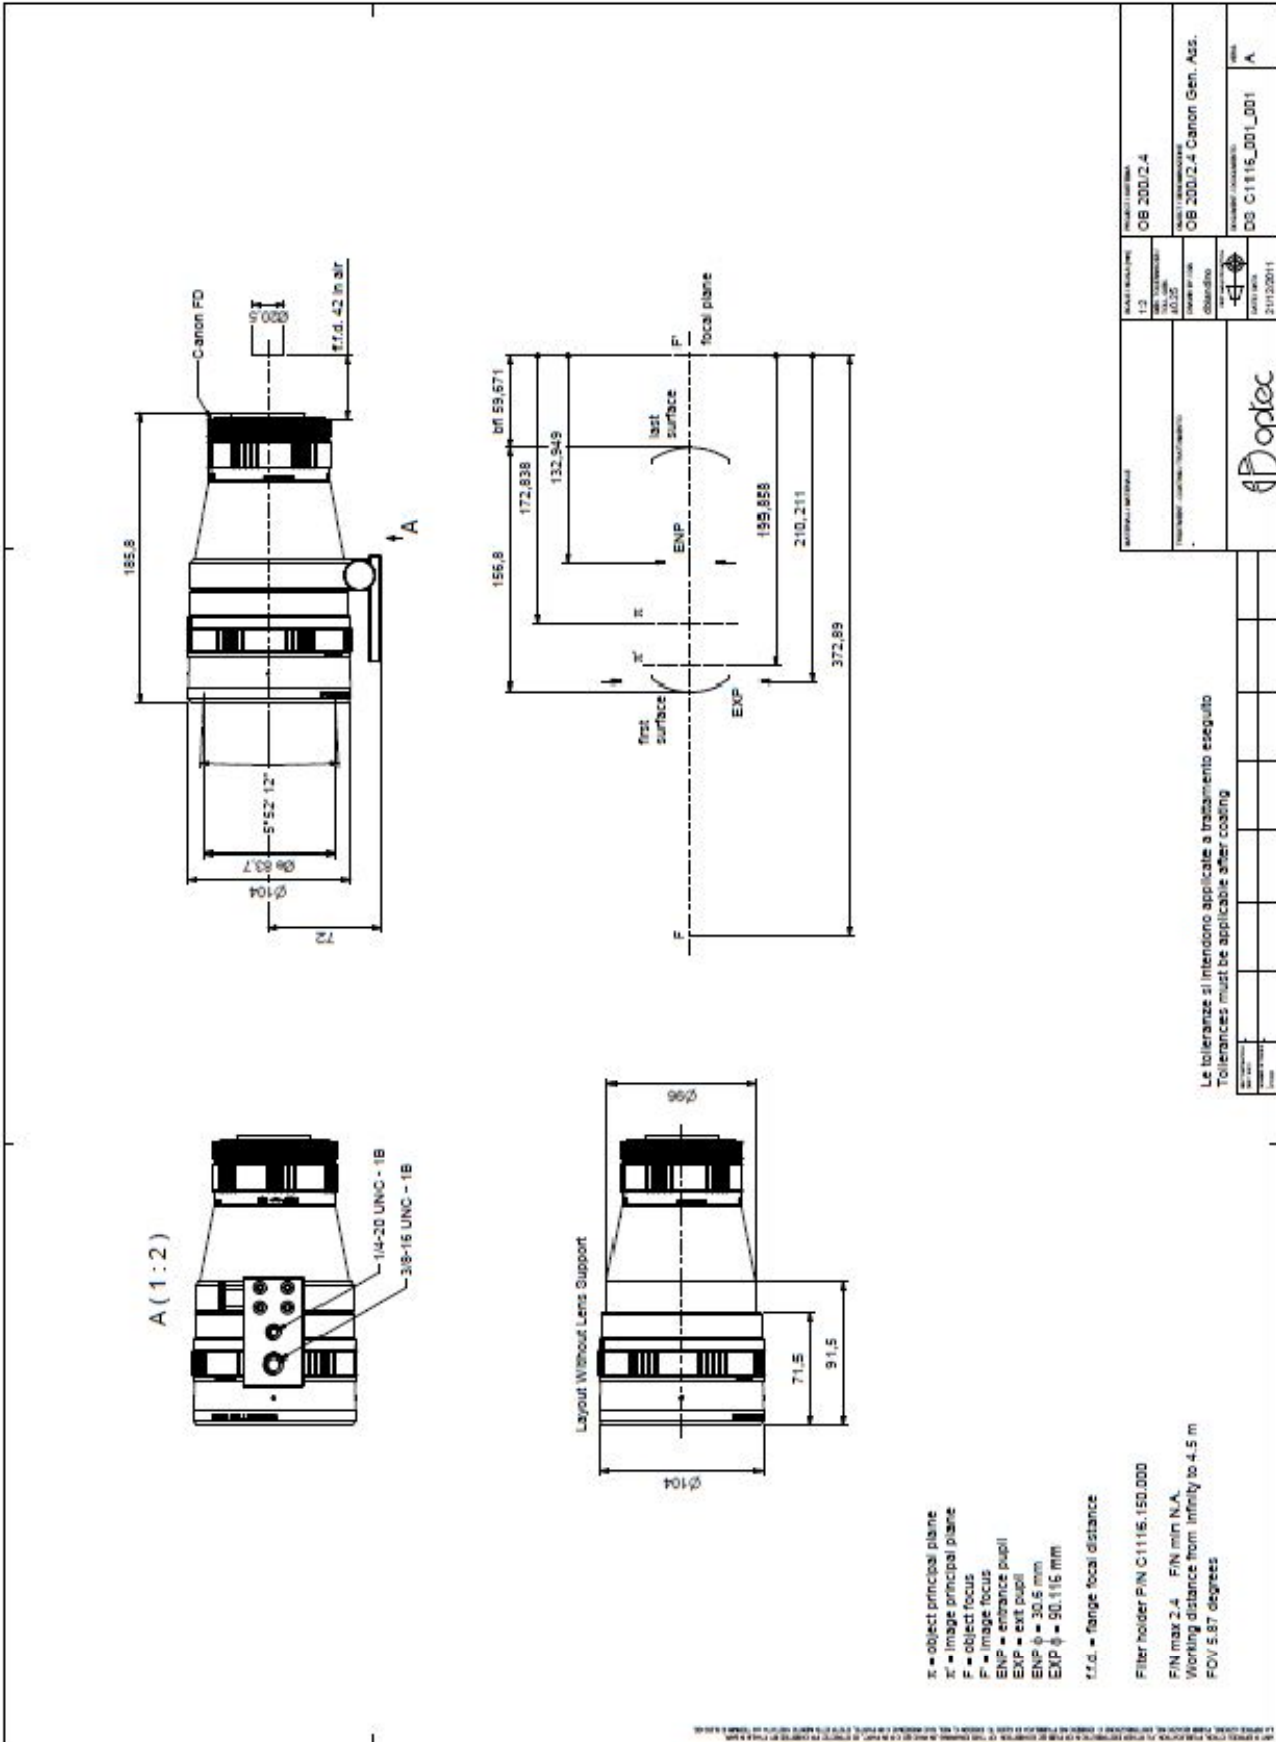

Specification are subject to change without notice

The present drawing is referring only to M42 non motorized versions:
 - C1116.003
 - C1116.007
 - C1116.012

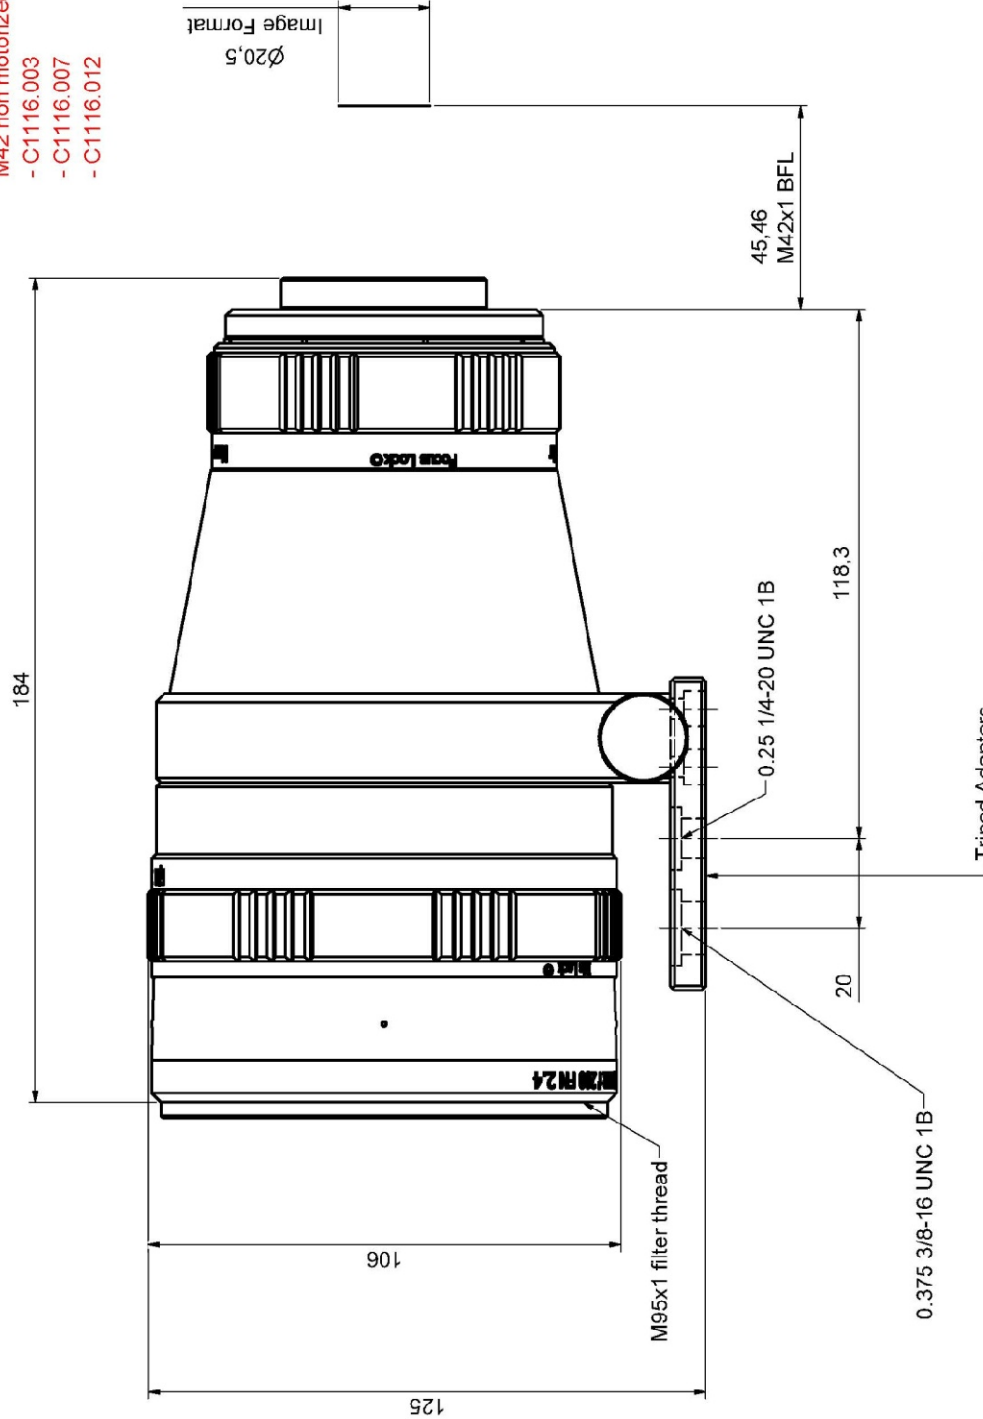


LA RIPRODUZIONE, PUBBLICAZIONE, DISTRIBUZIONE O ESIBIZIONE PUBBLICA DI QUESTO DISEGNO, NEL SUO INSIEME O IN PARTE, È STRETTAMENTE VIETATA AI TERMINI DI LEGGE.
 ANY REPRODUCTION, PUBLICATION, DISTRIBUTION OR PUBLIC EXHIBITION OF THIS DRAWING, IN WHOLE OR IN PART, IS STRICTLY PROHIBITED BY ITALIAN LAW.

MATERIAL / MATERIELE		SCALE / SCALA / UNITÀ	PROJECT / SISTEMA
TREATMENT - COATING / TRATTAMENTO		1-1	OB SWIR 200/2.4
FIRST ANGLE PROJECTION		GEN. TOLERANCES / TOLL. GEN. ±0,10	OBJECT / DENOMINAZIONE
DATE / DATA		DRAWN BY / DIS. dblandino	OB 200/2.4 M42 Gen. Ass.
NUMBER OF PAGES		DATE / DATA	DOCUMENT / DOCUMENTO
1		09/07/2011	DS C1116_003_000
VERSION		A	



Le tolleranze si intendono applicate a trattamento eseguito
 Tolerances must be applicable after coating

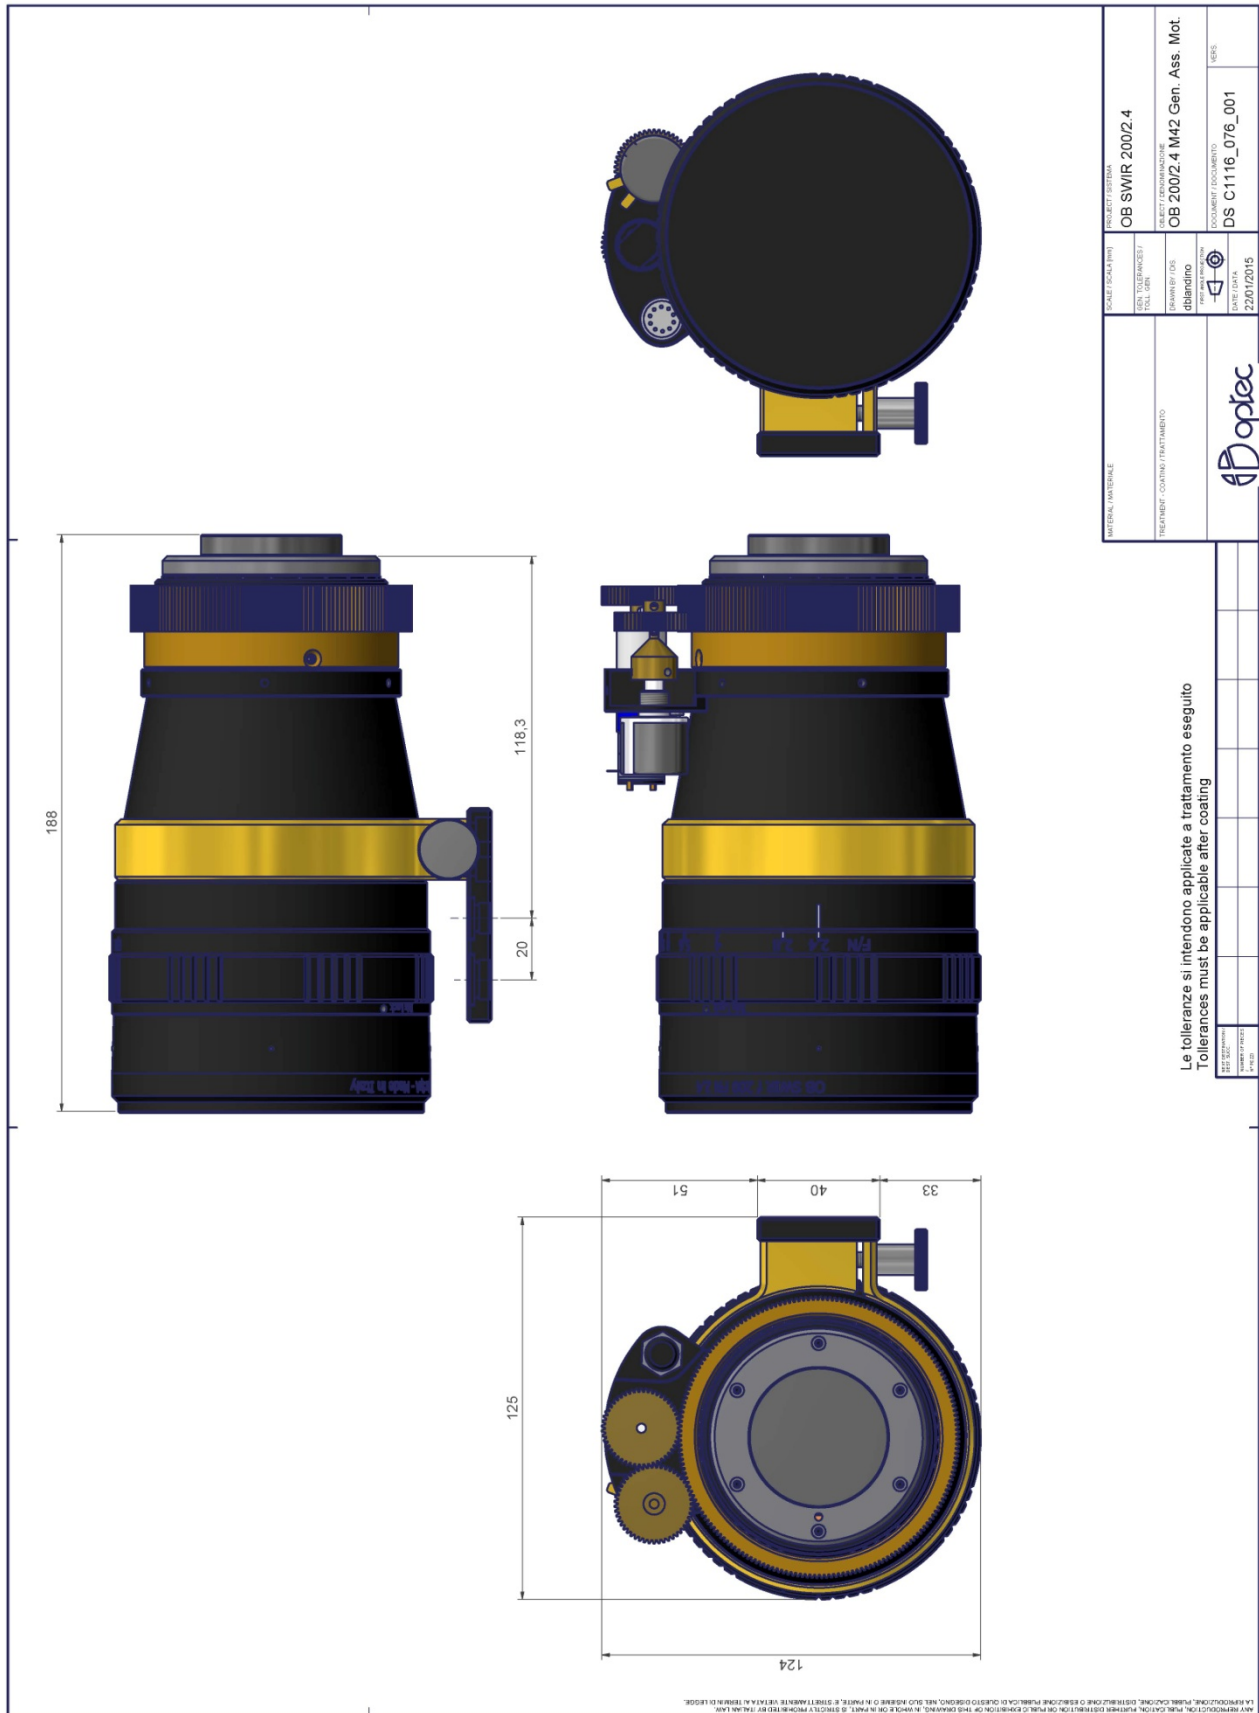

Specification are subject to change without notice